GREEN MAX

CONTACT

LINGLONG AMERICAS, INC.

E-mail:

linglong_sales@linglong.cn

Address:

Linglong Americas
1484 Medina Road Suite 118
Medina, OH 44256

Website:

na.greenmax-tire.com

Catalog

Web

@greenmaxtire

@greenmaxtire



PASSENGER CAR & LIGHT TRUCK TIRE CATALOG

GREEN MAX

na.greenmax-tire.com

TABLE OF CONTENTS

01 **COMPANY INTRODUCTION**

PASSENGER CAR

08 OPTIMUM UHP
12 OPTIMUM HP

SUV & LIGHT TRUCK

15 OPTIMUM SPORT HP
18 EARTH TRAXX R/T NEW (3PMSF)
22 OPTIMUM SPORT A/T (3PMSF)
26 OPTIMUM SPORT H/T
28 OPTIMUM X/T
34 OPTIMUM SPORT M/T

37 **REPLACEMENT MARKET TIRES WARRANTY MANUAL**

GREEN MAX

TIRE MANUFACTURER INTEGRATING TIRE DESIGN, DEVELOPMENT, MANUFACTURING AND SALES

COMPANY INTRODUCTION

GREEN MAX

Founded in 1975, Shandong Linglong Tyre Co., Ltd. has grown into one of the world's leading tire manufacturers, delivering innovative and high-performance tire solutions to customers across more than 170 countries. As a vertically integrated manufacturer, Linglong combines advanced research and development, intelligent manufacturing, global supply chain capabilities, and comprehensive customer support to meet the evolving needs of the automotive and commercial transportation industries.

173+
PRODUCTS SOLD TO OVER COUNTRIES WORLDWIDE

70+
OEM SERVICES PROVIDED TO OVER AUTOMAKERS

200+
OEM SERVICES FOR OVER PRODUCTION BASES

300+
CUMULATIVE OE TIRES EXCEEDING MILLION UNITS

1975
SINCE

GLOBAL LAYOUT



R&D Center in the United States

R&D Center in Germany

Serbia

Linglong International
Europe d.o.o.Zrenjanin

Linglong International
Tyre(Thailand)Co.,Ltd

Open R&D Innovation System

3 Countries

8 R&D Centers

1500+ Authorized Patents

2000+ Technical Team

Linglong Tire's global manufacturing network is built on a strategic "Globalization + Regionalization + Localization" approach, enabling the company to efficiently serve customers across key markets worldwide. With multiple production facilities throughout China and international manufacturing hubs in Thailand and Serbia, Linglong delivers scalable production capacity, reliable supply China performance, and localized market support to distributors, dealers, fleets, and OEM partners around the world.

Production Bases Outside China

- Linglong International Tyre (Thailand) Co., Ltd.
- Linglong International Europe d.o.o. Zrenianin
- Under continuous evaluation.

Production Bases in China

- Jilin Linglong Tyre Co., Ltd.
- Shandong Linglong Tyre Co., Ltd.
- Dezhou Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co., Ltd.
- Guangxi Linglong Tyre Co., Ltd.

MATCHING EVERY VEHICLE WITH THE RIGHT TIRE

IDENTIFY THE BEST TIRE SOLUTION FOR EVERY VEHICLE APPLICATION WITH PRODUCTS ENGINEERED TO DELIVER THE PERFORMANCE YOUR CUSTOMERS EXPECT.

	OPTIMUM UHP ULTRA-HIGH PERFORMANCE	OPTIMUM HP HIGH PERFORMANCE	OPTIMUM SPORT A/T ALL-TERRAIN	OPTIMUM X/T EXTREME ALL-TERRAIN
	◉ Best match ○ Secondary match		◉ Best match ○ Secondary match	
				
Sports Car	◉	○		
Luxury Performance Touring	○	◉		
Car & Minivan		◉		
CUV & SUV		○	○	○
Light Truck & Pickup			◉	◉
Light Commercial			○	○

	OPTIMUM SPORT HP SUV	EARTH TRAXX R/T RUGGED TERRAIN	OPTIMUM SPORT M/T MUD TERRAIN
	◉ Best match ○ Secondary match	◉ Best match ○ Secondary match	
		 NEW	
Sports Car			
Luxury Performance Touring	○		
Car & Minivan	◉		
CUV & SUV	◉	○	○
Light Truck & Pickup	○	◉	◉
Light Commercial		○	○

PASSENGER CAR
SUV & LIGHT TRUCK



PASSENGER CAR

OPTIMUM UHP 8

OPTIMUM HP 12

SUV & LIGHT TRUCK

OPTIMUM SPORT HP 15

EARTH TRAXX R/T (3PMSF) NEW 18

OPTIMUM SPORT A/T (3PMSF) 22

OPTIMUM SPORT H/T 26

OPTIMUM X/T 28

OPTIMUM SPORT M/T 34



OPTIMUM UHP

ULTRA-HIGH PERFORMANCE

Excellent Steering and Handling Performance

Continuous central ribs enhance the stiffness of the central pattern blocks helping improve steering performance

Big shoulder blocks deliver a larger contact patch and increase the grip and steering feedback for better handling performance

A reinforced high turn-up carcass provides responsive handling, increased structural strength and enhanced safety

MADE IN EUROPE


Outstanding Wet Road Performance

Unique Z-shaped tread pattern design cuts into the water effectively and reduces the risk of hydroplaning

Full depth notches along with angled siping ensures effective water displacement and enhance drainage speed for better performance in wet conditions



TEST RESULT

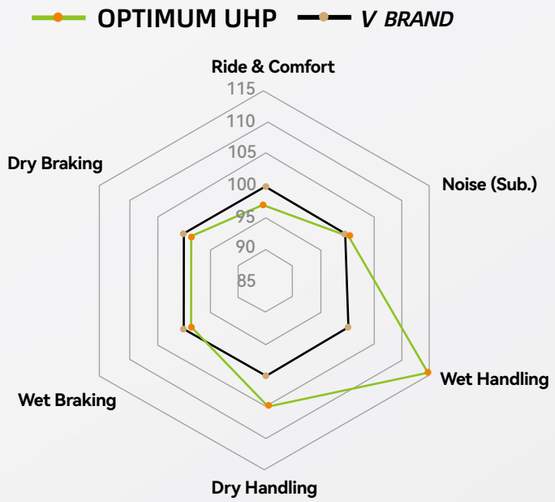

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	195/45R16 XL		84	V	61/2J	500	1102	340	50
	205/50R16 XL		91	W	61/2J	615	1356	340	50
	205/55R16 XL		94	W	61/2J	670	1477	340	50
	215/55R16 XL		97	W	7J	730	1609	340	50
	225/50R16 XL		96	V	7J	710	1565	340	50
17	205/40R17 XL		84	W	71/2J	500	1102	340	50
	205/45R17 XL		88	W	7J	560	1235	340	50
	205/50R17 XL		93	W	61/2J	650	1433	340	50
	215/40R17 XL		87	W	71/2J	545	1201	340	50
	215/45R17 XL		91	W	7J	615	1356	340	50
	215/50R17 XL		95	W	7J	690	1521	340	50
	215/55R17		94	W	7J	670	1477	300	44
	225/45R17 XL		94	W	71/2J	670	1477	340	50
	225/50R17 XL		98	W	7J	750	1653	340	50
	235/45R17 XL		97	W	8J	730	1609	340	50
	245/40R17 XL		95	W	81/2J	690	1521	340	50
	245/45R17 XL		99	W	8J	775	1709	340	50
18	215/35R18 XL		84	W	71/2J	500	1102	340	50
	215/40R18 XL		89	Y	71/2J	580	1279	340	50
	225/40R18 XL		92	Y	8J	630	1389	340	50
	225/45R18 XL		95	Y	71/2J	690	1521	340	50
	225/50R18		95	W	7J	690	1521	300	44
	235/40R18 XL		95	W	81/2J	690	1521	340	50



OPTIMUM UHP

ULTRA-HIGH PERFORMANCE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18	235/45R18 XL		98	Y	8J	750	1653	340	50
	235/50R18		97	Y	71/2J	730	1609	300	44
	245/40R18 XL		97	W	81/2J	730	1609	340	50
	245/45R18 XL		100	Y	8J	800	1764	340	50
	255/45R18 XL		103	W	81/2J	875	1929	340	50
19	225/35R19 XL		88	W	8J	560	1235	340	50
	235/35R19 XL		91	W	81/2J	615	1356	340	50
	235/40R19 XL		96	Y	81/2J	710	1565	340	50
	245/40R19 XL		98	Y	81/2J	750	1653	340	50
	245/45R19 XL		102	W	8J	850	1874	340	50
	275/30R19 XL		96	W	91/2J	710	1565	340	50
	275/35R19 XL		100	Y	91/2J	800	1764	340	50
20	235/45R20 XL		100	W	8J	800	1764	340	50
	245/35R20 XL		95	W	81/2J	690	1521	340	50
	245/40R20 XL		99	Y	81/2J	775	1709	340	50
	245/45R20 XL		103	Y	8J	875	1929	340	50
	245/50R20		102	V	71/2J	850	1874	300	44
	255/35R20 XL		97	W	9J	730	1609	340	50
	255/45R20 XL		105	Y	81/2J	925	2039	340	50
	275/30R20 XL		97	Y	91/2J	730	1609	340	50
	275/35R20 XL		102	Y	91/2J	850	1874	340	50
	275/40R20 XL		106	Y	91/2J	950	2094	340	50
	275/45R20 XL		110	V	9J	1060	2337	340	50



OPTIMUM UHP

ULTRA-HIGH PERFORMANCE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
20	275/55R20 XL		117	W	81/2J	1285	2833	340	50
22	225/35R22 XL		90	W	8J	600	1323	340	50
	235/30R22 XL		90	W	81/2J	600	1323	340	50
	245/30R22 XL		92	W	81/2J	630	1389	340	50
	255/30R22 XL		95	W	9J	690	1521	340	50
	265/35R22 XL		102	W	91/2J	850	1874	340	50
	265/40R22 XL		106	V	91/2J	950	2094	340	50
	285/35R22 XL		106	W	10J	950	2094	340	50
	285/40R22 XL		110	V	10J	1060	2337	340	50
	285/45R22 XL		114	W	91/2J	1180	2601	340	50
	295/25R22 XL		97	W	101/2J	730	1609	340	50
	305/40R22 XL		114	V	11J	1180	2601	340	50
	305/45R22 XL		118	V	10J	1320	2910	340	50
24	255/30R24 XL		97	W	9J	730	1609	340	50
	275/25R24 XL		96	W	10J	710	1565	340	50
	295/35R24 XL		110	V	101/2J	1060	2337	340	50
	305/35R24 XL		112	V	11J	1120	2469	340	50
26	275/25R26 XL		98	W	10J	750	1653	340	50
	295/30R26 XL		107	W	101/2J	975	2149	340	50
	305/30R26 XL		109	W	11J	1030	2271	340	50
28	275/25R28 XL		99	W	10J	775	1709	340	50
	295/25R28 XL		103	V	101/2J	875	1929	340	50
30	275/25R30 XL		101	W	10J	825	1819	340	50



OPTIMUM HP

HIGH PERFORMANCE TIRE

Impressive Linear Stability & Handling Performance

A multiple variable pitch design helps optimize pitch ratio and improve straight line stability

High composite cushion rubber provides excellent handling performance

Outstanding Wet and Snowy Road Performance


Engineered with open shoulder grooves and corrugated sipes to improve water drainage, traction and overall wet-weather performance


An advanced tread compound and increased lateral sipe density enhance traction and control on light snow-covered roads

MADE IN EUROPE



TEST RESULT

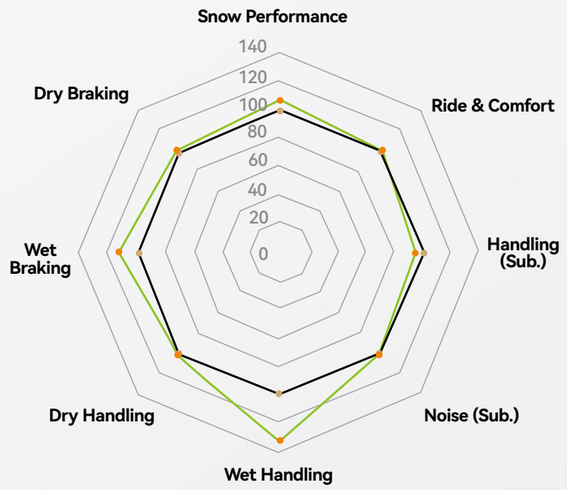


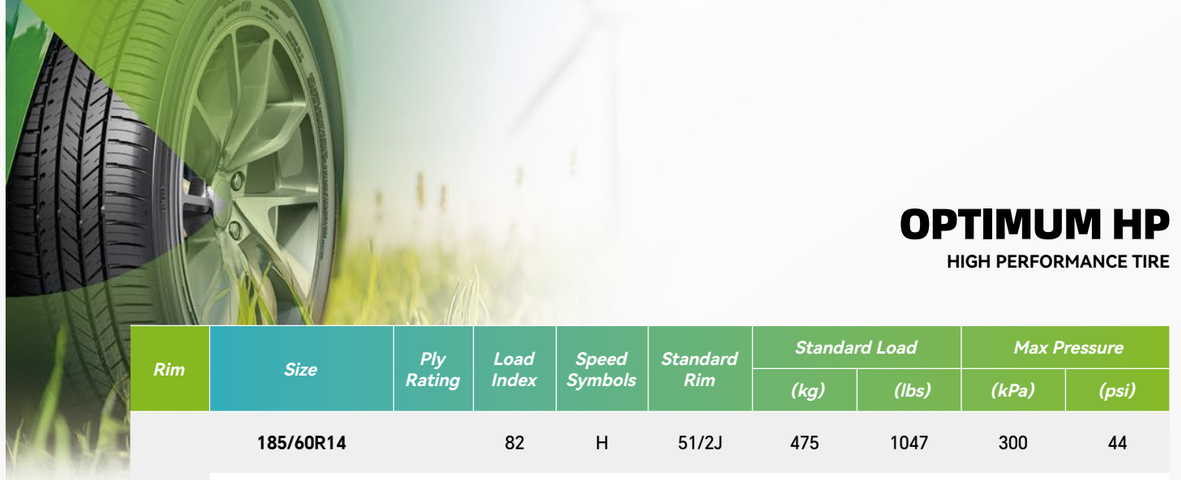

OPTIMUM HP

HIGH PERFORMANCE TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						(kg)	(lbs)	(kPa)	(psi)
14	185/60R14		82	H	51/2J	475	1047	300	44
	185/65R14		86	H	51/2J	530	1168	300	44
	195/70R14		91	H	6J	615	1356	300	44
15	185/60R15		84	H	51/2J	500	1102	300	44
	185/65R15		88	H	51/2J	560	1235	300	44
	195/50R15 XL		86	V	6J	530	1168	340	50
	195/55R15		85	V	6J	515	1135	300	44
	195/60R15		88	H	6J	560	1235	300	44
	195/65R15		91	H	6J	615	1356	300	44
	205/60R15		91	H	6J	615	1356	300	44
	205/65R15		94	H	6J	670	1477	300	44
	215/60R15		94	H	61/2J	670	1477	300	44
	215/65R15 XL		100	H	61/2J	800	1764	340	50
	215/70R15		98	T	61/2J	750	1653	300	44
	225/70R15		100	T	61/2J	800	1764	300	44
	255/70R15		108	S	71/2J	1000	2205	300	44
16	205/55R16		91	V	61/2J	615	1356	300	44
	205/60R16		92	H	6J	630	1389	300	44

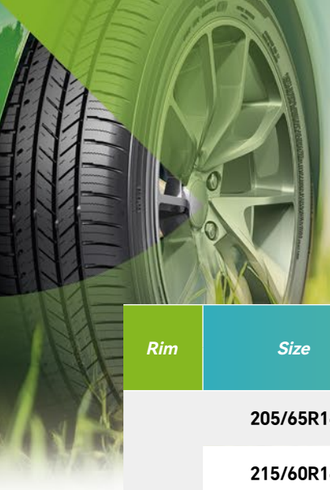

OPTIMUM HP

HIGH PERFORMANCE TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						(kg)	(lbs)	(kPa)	(psi)
16	205/65R16		95	H	6J	690	1521	300	44
	215/60R16		95	V	61/2J	690	1521	300	44
	215/65R16		98	H	61/2J	750	1653	300	44
	225/55R16		95	V	7J	690	1521	300	44
	225/60R16		98	H	61/2J	750	1653	300	44
	225/65R16		100	H	61/2J	800	1764	300	44
	225/70R16 XL		107	H	61/2J	975	2149	340	50
	235/60R16		100	H	7J	800	1764	300	44
	235/65R16		103	H	7J	875	1929	300	44
17	215/55R17		94	V	7J	670	1477	300	44
	215/60R17		96	H	61/2J	710	1565	300	44
	215/65R17		99	H	61/2J	775	1709	300	44
	225/55R17		97	V	7J	730	1609	300	44
	225/60R17		99	H	61/2J	775	1709	300	44
	225/65R17		102	H	61/2J	850	1874	300	44
	235/55R17		99	H	71/2J	775	1709	300	44
	235/60R17		102	H	7J	850	1874	300	44
	235/65R17		104	H	7J	900	1984	300	44
18	225/55R18		98	H	7J	750	1653	300	44
	235/65R18		106	H	7J	950	2094	300	44



OPTIMUM SPORT HP

SUV TIRE

Excellent Handling and Steering Performance

The asymmetric tread pattern features an inner section optimized for wet traction and braking, while the reinforced outer shoulder enhances steering precision and handling

Continuous shoulder rib design improves stiffness in the shoulders resulting in greater stability at high speeds

MADE IN EUROPE

Superior Braking Performance


The four-groove tread design rapidly channels water away from the contact patch, delivering enhanced hydroplaning resistance and wet-road performance

Excellent Snow Performance

Engineered with deep herringbone shoulder sipes to maximize water evacuation and provide confident grip in wet and light snow conditions



TEST RESULT

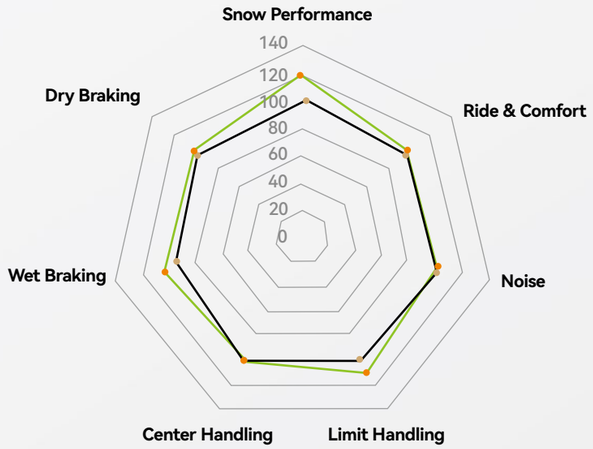




OPTIMUM SPORT HP

SUV TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	205/70R15		96	H	6J	710	1565	300	44
	235/70R15 XL		106	H	7J	950	2094	340	50
16	205/70R16		97	V	6J	730	1609	300	44
	215/65R16 XL		102	H	61/2J	850	1874	340	50
	215/70R16		100	H	61/2J	800	1764	300	44
	225/60R16		98	H	61/2J	750	1653	300	44
	225/75R16		104	H	6J	900	1984	300	44
	235/70R16		106	H	7J	950	2094	300	44
	245/70R16 XL		111	H	7J	1090	2403	340	50
	265/70R16		112	H	8J	1120	2469	300	44
	275/70R16		114	H	8J	1180	2601	300	44
17	215/60R17		96	H	61/2J	710	1565	300	44
	225/55R17 XL		101	V	7J	825	1819	340	50
	225/60R17		99	H	61/2J	775	1709	300	44
	225/65R17		102	H	61/2J	850	1874	300	44
	235/55R17 XL		103	W	71/2J	875	1929	340	50
	235/60R17 XL		106	V	7J	950	2094	340	50
	235/65R17 XL		108	V	7J	1000	2205	340	50
	235/70R17 XL		109	T	7J	1030	2271	340	50
	245/65R17 XL		111	H	7J	1090	2403	340	50
	255/60R17		106	H	71/2J	950	2094	300	44
	255/65R17		110	H	71/2J	1060	2337	300	44
	255/70R17		112	T	71/2J	1120	2469	300	44

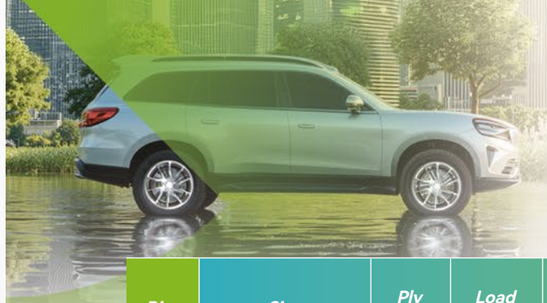

OPTIMUM SPORT HP

SUV TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17	265/65R17		112	H	8J	1120	2469	300	44
	275/55R17		109	V	81/2J	1030	2271	300	44
18	225/60R18		100	H	61/2J	800	1764	300	44
	235/55R18 XL		104	V	71/2J	900	1984	340	50
	235/60R18 XL		107	W	7J	975	2149	340	50
	235/65R18		106	H	7J	950	2094	300	44
	245/60R18		105	V	7J	925	2039	300	44
	255/55R18 XL		109	V	8J	1030	2271	340	50
	255/60R18 XL		112	V	71/2J	1120	2469	340	50
	255/65R18		111	H	71/2J	1090	2403	300	44
	255/70R18		113	T	71/2J	1150	2535	300	44
	265/60R18		110	H	8J	1060	2337	300	44
	265/65R18		114	H	8J	1180	2601	300	44
	265/70R18		116	T	8J	1250	2756	300	44
	275/60R18		113	H	8J	1150	2535	300	44
	275/65R18		116	H	8J	1250	2756	300	44
19	235/55R19 XL		105	V	71/2J	925	2039	340	50
	245/55R19		103	V	71/2J	875	1929	300	44
	255/50R19 XL		107	W	8J	975	2149	340	50
	255/60R19		109	H	71/2J	1030	2271	300	44
	255/55R19 XL		111	V	8J	1090	2403	340	50
20	255/50R20 XL		109	V	8J	1030	2271	340	50
	275/60R20		115	T	8J	1215	2679	300	44

EARTH TRAXX R/T

RUGGED TERRAIN TIRE



Superior Traction Across Rugged Terrain and All-Season Conditions

The diagonal symmetrical tread pattern features aggressive biting edges that enhance grip and traction across mud, snow and rugged terrain

Durability

Engineered with a high-strength carcass to provide superior protection against impacts and punctures while delivering long-lasting tread wear in demanding conditions

Excellent Snow Performance


Interlocked tread blocks with advanced compound and zigzag siping design bring excellent grip in wet and snowy road conditions

TECHNICAL DATA


Rim Diameter:	Section Width:
16-22	265-345
Cross Section:	**Speed Symbol:**
55-80	Q-T



TEST RESULT

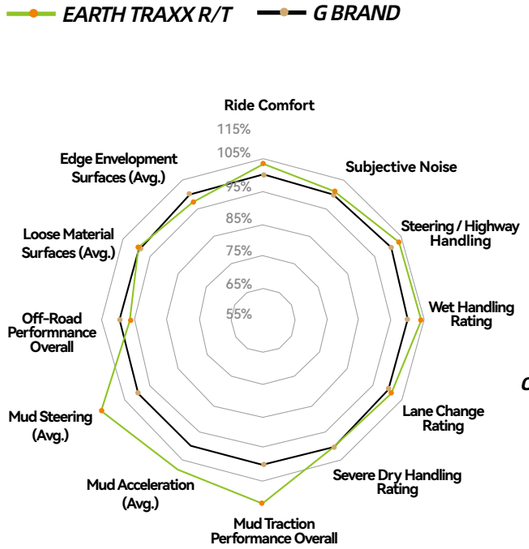

PERFORMANCE RATING

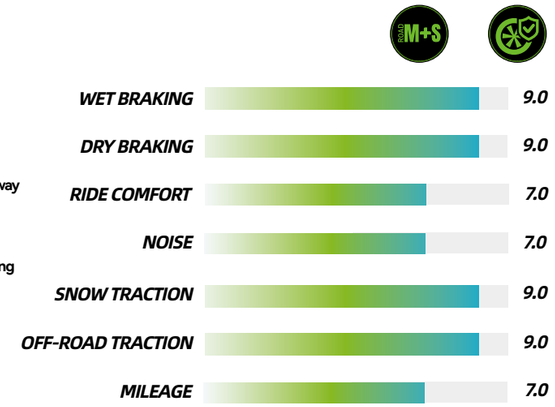

Rim	Size	PR	Load Index	Speed symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Section Width		Tread Depth	
						kg	lbs	kpa	psi	mm	in	mm	in	mm	32nds
16	**265/70R16 XL**		116	T	8J	1250	2756	340	50	778	30.63	272	10.71	9.3	11.72
	265/75R16		116	T	7 1/2J	1250	2756	300	44	804	31.65	267	10.51	9.3	11.72
	LT265/75R16	10PR	123/120	Q	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80	810	31.89	267	10.51	11.9	14.99
	LT285/75R16	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80	840	33.07	286	11.26	11.9	14.99
	LT295/75R16	10PR	128/125	Q	8J	D 1650 S 1800	D 3640 S 3970	550	80	854	33.62	294	11.57	11.9	14.99
	LT305/70R16	10PR	124/121	Q	9J	D 1450 S 1600	D 3195 S 3525	450	65	840	33.07	311	12.24	11.9	14.99
	LT315/75R16	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	450	65	884	34.80	313	12.32	12.8	16.13

EARTH TRAXX R/T

RUGGED TERRAIN TIRE

Rim	Size	PR	Load Index	Speed symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Section Width		Tread Depth	
						kg	lbs	kpa	psi	mm	in	mm	in	mm	32nds
	265/65R17 XL		116	T	8J	1250	2756	340	50	776	30.55	272	10.71	9.3	11.72
	265/70R17		115	T	8J	1215	2679	300	44	804	31.65	272	10.71	9.3	11.72
	285/70R17		116	Q	8 1/2J	1250	2756	300	44	832	32.76	292	11.50	9.3	11.72
	33X12.50R17LT	10PR	120	R	10J	1400	3085	450	65	832	32.76	318	12.52	11.9	14.99
	35X12.50R17LT	10PR	125	R	10J	1650	3640	450	65	883	34.76	318	12.52	11.9	14.99
	37X12.50R17LT	8PR	124	Q	10J	1600	3525	350	50	934	36.77	318	12.52	12.8	16.13
	37X13.50R17LT	10PR	121	Q	11J	1450	3195	450	65	934	36.77	345	13.58	12.8	16.13
17	**LT255/80R17**	10PR	121/118	Q	7J	D 1320 S 1450	D 2910 S 3195	550	80	846	33.31	255	10.04	11.9	14.99
	LT265/70R17	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80	810	31.89	272	10.71	11.9	14.99
	LT285/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80	838	32.99	292	11.50	11.9	14.99
	LT285/75R17	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80	866	34.09	286	11.26	11.9	14.99
	LT295/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80	852	33.54	299	11.77	11.9	14.99
	LT305/70R17	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	450	65	866	34.09	311	12.24	11.9	14.99
	LT315/70R17	10PR	126/123	Q	9 1/2J	D 1550 S 1700	D 3415 S 3750	450	65	880	34.65	323	12.72	12.8	16.13
18	**255/55R18 XL**		109	T	8J	1030	2271	340	50	737	29.02	265	10.43	9.3	11.72
	255/70R18 XL		116	T	7 1/2J	1250	2756	340	50	815	32.09	260	10.24	9.3	11.72

EARTH TRAXX R/T

RUGGED TERRAIN TIRE

Rim	Size	PR	Load Index	Speed symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Section Width		Tread Depth	
						kg	lbs	kpa	psi	mm	in	mm	in	mm	32nds
	275/55R20XL		117	T	8 1/2J	1285	2833	340	50	810	31.89	284	11.18	10.1	12.69
	275/60R20XL		116	T	8J	1250	2756	340	50	838	32.99	279	10.98	10.1	12.69
	33X12.50R20LT	12PR	119	Q	10J	1360	3000	550	80	826	32.52	318	12.52	13.8	17.36
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80	877	34.53	318	12.52	13.8	17.35
	35X13.50R20LT	12PR	126	Q	11J	1700	3750	550	80	877	34.53	345	13.58	13.8	17.35
	37X12.50R20LT	12PR	128	Q	10J	1800	3970	550	80	928	36.54	318	12.52	13.8	17.35
20	**LT275/55R20**	10PR	120/117	Q	8 1/2J	S 1400 D 1285	S 3085 D 2835	550	80	810	31.89	284	11.18	12.5	15.80
	LT275/65R20	10PR	126/123	Q	8J	S 1700 D 1550	S 3750 D 3415	550	80	866	34.09	279	10.98	12.5	15.80
	LT285/55R20	10PR	122/119	S	9J	S 1500 D 1360	S 3305 D 3000	550	80	822	32.36	297	11.69	12.5	15.80
	LT285/60R20	10PR	125/122	Q	8 1/2J	S 1650 D 1500	S 3640 D 3305	550	80	850	33.46	292	11.50	12.5	15.80
	LT305/55R20	12PR	125/122	Q	9 1/2J	S 1650 D 1500	S 3640 D 3305	550	80	844	33.23	316	12.44	12.5	15.80
22	**33X12.50R22LT**	12PR	114	Q	10 1/2J	1180	2600	550	80	826	32.52	316	12.44	13.8	17.35
	35X12.50R22LT	12PR	121	Q	10J	1450	3195	550	80	877	34.53	318	12.52	13.8	17.35
	37X12.50R22LT	12PR	127	Q	10J	1750	3860	550	80	928	36.54	318	12.52	13.8	17.35
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80	928	36.54	345	13.58	13.8	17.35



OPTIMUM SPORT A/T

ALL-TERRAIN TIRE

Outstanding Off-Road Traction

Engineered with an aggressive buttressed sidewall, the design improves off-road grip, increases traction at lower air pressures and delivers a distinctive, rugged appearance

The staggered sidewall lug design reinforced by integrated tie bars, increases shoulder rigidity for enhanced traction and durability in demanding off-road conditions


MADE IN EUROPE


Perfect Grip on Snowy Surfaces

Increased density of lateral sipe provide outstanding traction on snow covered roads



TEST RESULT

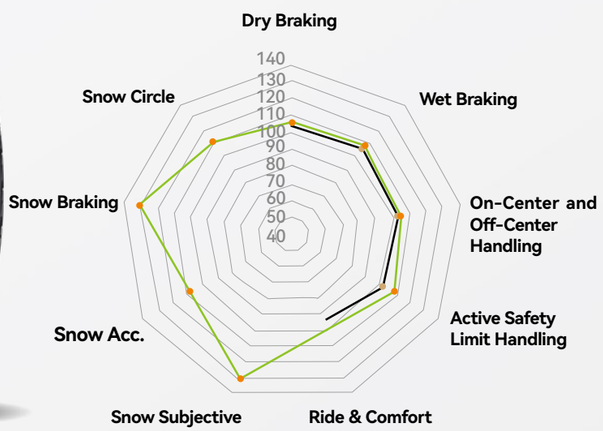

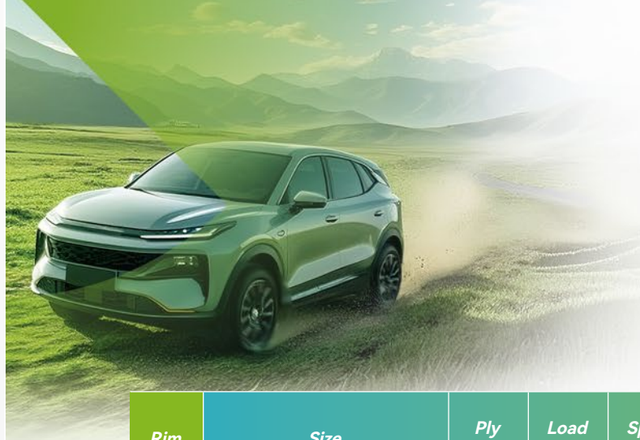

OPTIMUM SPORT A/T

ALL-TERRAIN TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	235/75R15 XL OWL		109	T	61/2J	1030	2271	340	50
	265/70R15 OWL		112	T	8J	1120	2469	300	44
	LT235/75R15	6PR	104/101	R	61/2J	D825 S900	D1820 S1985	350	50
	30X9.50R15LT OWL	6PR	104	S	71/2J	900	1985	350	50
	31X10.50R15LT OWL	6PR	109	R	81/2J	1030	2270	350	50
16	235/70R16 OWL		106	T	7J	950	2094	300	44
	245/70R16 XL OWL		111	T	7J	1090	2403	340	50
	245/75R16 OWL		111	T	7J	1090	2403	300	44
	255/70R16		111	S	71/2J	1090	2403	300	44
	265/70R16 OWL		112	T	8J	1120	2469	300	44
	265/75R16 OWL		116	T	71/2J	1250	2756	300	44
	LT215/85R16	10PR	115/112	Q	6J	D1120 S1215	D2470 S2680	550	80
	LT225/75R16 OWL	10PR	115/112	Q	6J	D1120 S1215	D2470 S2680	550	80
	LT235/85R16 OWL	10PR	120/116	S	61/2J	D1260 S1380	D2778 S3042	550	80
	LT245/75R16 OWL	10PR	120/116	Q	7J	D1260 S1380	D2778 S3042	550	80
	LT265/75R16 OWL	10PR	123/120	R	71/2J	D1400 S1550	D3085 S3415	550	80
	LT285/75R16	10PR	126/123	R	8J	D1550 S1700	D3415 S3750	550	80
	LT305/70R16 OWL	10PR	124/121	R	9J	D1450 S1600	D3195 S3525	450	65



OPTIMUM SPORT A/T

ALL-TERRAIN TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17	245/65R17 XL OWL		111	T	7J	1090	2403	340	50
	245/70R17 OWL		110	S	7J	1060	2337	300	44
	265/65R17		112	T	8J	1120	2469	300	44
	265/70R17		115	T	8J	1215	2679	300	44
	285/70R17 OWL		116	T	81/2J	1250	2756	300	44
	LT235/80R17 OWL	10PR	120/117	R	61/2J	D1285 S1400	D2835 S3085	550	80
	LT245/75R17 OWL	10PR	121/118	R	7J	D1320 S1450	D2910 S3195	550	80
	LT265/70R17 OWL	10PR	121/118	R	8J	D1320 S1450	D2910 S3195	550	80
	LT285/70R17 OWL	8PR	121/118	S	81/2J	D1320 S1450	D2910 S3195	450	65
	LT285/75R17 OWL	8PR	121/118	S	81/2J	D1320 S1450	D2910 S3195	450	65
	LT305/70R17 OWL	8PR	119/116	R	9J	D1250 S1360	D2755 S3000	350	50
18	255/70R18 OWL		113	S	71/2J	1150	2535	300	44
	265/70R18 OWL		116	T	8J	1250	2756	300	44
	275/65R18		116	T	8J	1250	2756	300	44



OPTIMUM SPORT A/T

ALL-TERRAIN TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18	LT265/65R18 OWL	10PR	122/119	Q	8J	D1360 S1500	D3000 S3305	550	80
	LT265/70R18 OWL	10PR	124/121	S	8J	D1450 S1600	D3195 S3525	550	80
	LT275/65R18 OWL	10PR	123/120	S	8J	D1400 S1550	D3085 S3415	550	80
	LT275/70R18 OWL	10PR	125/122	S	8J	D1500 S1650	D3305 S3640	550	80
	LT305/70R18 OWL	10PR	121/118	R	9J	D1320 S1450	D2910 S3195	450	65
20	275/55R20 OWL		113	S	81/2J	1150	2535	300	44
	275/60R20 OWL		115	T	8J	1215	2679	300	44
	LT275/55R20 OWL	10PR	120/117	Q	81/2J	D1285 S1400	D2835 S3085	550	80
	LT275/60R20	10PR	123/120	Q	8J	D1400 S1550	D3085 S3415	550	80
	LT275/65R20 OWL	10PR	126/123	S	8J	D1550 S1700	D3415 S3750	550	80
	LT285/55R20	10PR	122/119	S	9J	D1360 S1500	D3000 S3300	550	80
	LT305/55R20 OWL	10PR	121/118	R	91/2J	D1320 S1450	D2910 S3195	450	65
	35X12.50R20LT OWL	10PR	121	Q	10J	1450	3195	450	65



OPTIMUM SPORT H/T

HIGHWAY TERRAIN TIRE

Delivers Superb Handling in Changing Weather Conditions

Stiff shoulder blocks enhance cornering grip for better steering response and stability

Engineered with multi-angle sipes and an optimized void-to-rubber ratio to maximize traction, handling and all-season confidence


Outstanding Dry & Wet Breaking Performance

Four circumferential grooves increase the drainage capacity and grip on wet roads

MADE IN EUROPE



TEST RESULT

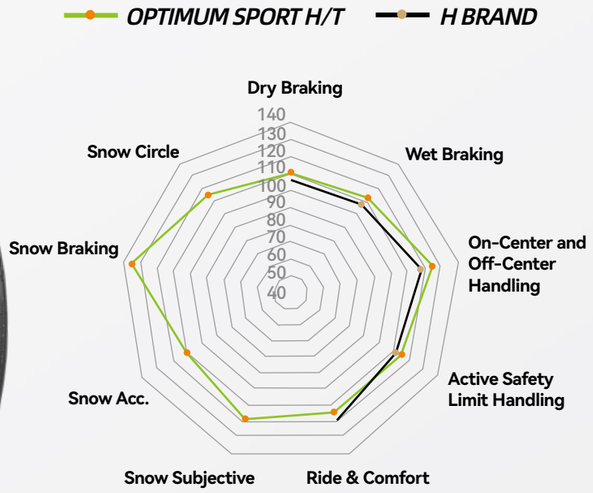



Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	235/75R15 XL	-	109	T	61/2J	1030	2271	340	50
	31×10.50R15LT	6PR	109	R	81/2J	1030	2270	350	50
16	225/70R16	-	103	T	61/2J	875	81929	300	44
	245/75R16	-	111	T	7J	1090	2403	300	44
	255/70R16	-	111	T	71/2J	1090	2403	300	44
	265/75R16	-	116	T	71/2J	1250	2756	300	44
	LT215/85R16	10PR	115/112	S	6J	D1120 S1215	D2470 S2680	550	80
	LT225/75R16	10PR	115/112	S	6J	D1120 S1215	D2470 S2680	550	80
	LT235/85R16	10PR	120/116	R	61/2J	D1260 S1380	D2778 S3042	550	80
	LT245/75R16	10PR	120/116	R	7J	D1260 S1380	D2778 S3042	550	80
	LT265/75R16	10PR	123/120	R	71/2J	D1400 S1550	D3085 S3415	550	80
17	235/65R17	-	104	T	7J	900	1984	300	44
	245/70R17	-	110	T	7J	1060	2337	300	44
	265/65R17	-	112	T	8J	1120	2469	300	44
	265/70R17	-	115	T	8J	1215	2679	300	44
	275/65R17	-	115	S	8J	1215	2679	300	44
	285/65R17	-	116	S	81/2J	1250	2756	300	44
	LT235/80R17	10PR	120/117	R	61/2J	D1285 S1400	D2835 S3085	550	80
	LT245/75R17	10PR	121/118	R	7J	D1320 S1450	D2910 S3195	550	80
	LT265/70R17	10PR	121/118	R	8J	D1320 S1450	D2910 S3195	550	80
	LT285/70R17	10PR	121/118	S	81/2J	D1320 S1450	D2910 S3195	550	80
18	LT265/70R18	10PR	124/121	R	8J	D1450 S1600	D3195 S3525	550	80
	LT275/65R18	10PR	123/120	S	8J	D1285 S1550	D2835 S3415	550	80
	LT275/70R18	10PR	125/122	S	8J	D1400 S1650	D3085 S3640	550	80
20	265/50R20 XL	-	111	H	81/2J	1090	2403	340	50
	275/55R20 XL	-	117	T	81/2J	1285	2833	340	50



OPTIMUM X/T

EXTREME ALL-TERRAIN TIRE


M+S

- Wide tread and optimized pitch design provides extraordinary grip
- Wide grooves enhance hydroplaning resistance and off-road traction
- The high-density siping pattern enhances traction on wet and snow-covered roads, providing reliable all-weather performance

MADE IN EUROPE



TEST RESULT

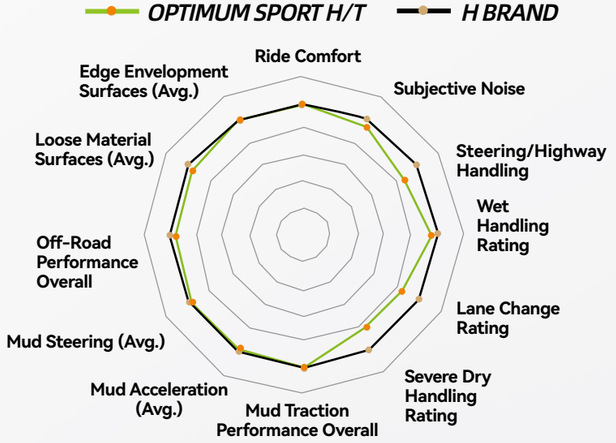

Rim	Size	PR	Load Index	Speed symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Section Width		Tread Depth	
						kg	lbs	kpa	psi	mm	in	mm	in	mm	32nds
16	265/70R16 XL		116	T	8J	1250	2756	340	50	778	30.63	272	10.71	9.3	11.72
	265/75R16		116	T	7 1/2J	1250	2756	300	44	804	31.65	267	10.51	9.3	11.72
	LT265/75R16	10PR	123/120	Q	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80	810	31.89	267	10.51	11.9	14.99
	LT285/75R16	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80	840	33.07	286	11.26	11.9	14.99
	LT295/75R16	10PR	128/125	Q	8J	D 1650 S 1800	D 3640 S 3970	550	80	854	33.62	294	11.57	11.9	14.99
	LT305/70R16	10PR	124/121	Q	9J	D 1450 S 1600	D 3195 S 3525	450	65	840	33.07	311	12.24	11.9	14.99



Rim	Size	PR	Load Index	Speed symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Section Width		Tread Depth	
						kg	lbs	kpa	psi	mm	in	mm	in	mm	32nds
16	LT315/75R16	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	450	65	884	34.80	313	12.32	12.8	16.13
17	265/65R17 XL		116	T	8J	1250	2756	340	50	776	30.55	272	10.71	9.3	11.72
	265/70R17		115	T	8J	1215	2679	300	44	804	31.65	272	10.71	9.3	11.72
	285/70R17		116	Q	8 1/2J	1250	2756	300	44	832	32.76	292	11.50	9.3	11.72
	33X12.50R17LT	10PR	120	R	10J	1400	3085	450	65	832	32.76	318	12.52	11.9	14.99
	35X12.50R17LT	10PR	125	R	10J	1650	3640	450	65	883	34.76	318	12.52	11.9	14.99
	37X12.50R17LT	8PR	124	Q	10J	1600	3525	350	50	934	36.77	318	12.52	12.8	16.13
	37X13.50R17LT	10PR	121	Q	11J	1450	3195	450	65	934	36.77	345	13.58	12.8	16.13
	LT255/80R17	10PR	121/118	Q	7J	D 1320 S 1450	D 2910 S 3195	550	80	846	33.31	255	10.04	11.9	14.99
	LT265/70R17	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80	810	31.89	272	10.71	11.9	14.99
	LT285/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80	838	32.99	292	11.50	11.9	14.99
	LT285/75R17	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80	866	34.09	286	11.26	11.9	14.99
	LT295/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1 450	D 2910 S 3195	550	80	852	33.54	299	11.77	11.9	14.99
	LT305/70R17	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	450	65	866	34.09	311	12.24	11.9	14.99
	LT315/70R17	10PR	126/123	Q	9 1/2J	D 1550 S 1700	D 3415 S 3750	450	65	880	34.65	323	12.72	12.8	16.13
18	255/55R18 XL		109	T	8J	1030	2271	340	50	737	29.02	265	10.43	9.3	11.72
	255/70R18 XL		116	T	7 1/2J	1250	2756	340	50	815	32.09	260	10.24	9.3	11.72



OPTIMUM X/T

EXTREME ALL-TERRAIN TIRE

Rim	Size	PR	Load Index	Speed symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Section Width		Tread Depth	
						kg	lbs	kpa	psi	mm	in	mm	in	mm	32nds
	265/60R18 XL		114	s	8J	1180	2601	340	50	775	30.51	272	10.71	9.3	11.72
	265/65R18 XL		116	T	8J	1250	2756	340	50	801	31.54	272	10.71	9.3	11.72
	265/70R18		116	S	8J	1250	2756	300	44	829	32.64	272	10.71	9.3	11.72
	275/65R18 XL		116	T	8J	1250	2756	300	44	815	32.09	279	10.98	9.3	11.72
	285/60R18 XL		120	T	8 1/2J	1400	3086	340	50	799	31.46	292	11.50	9.3	11.72
	305/60R18		116	Q	9J	1250	2756	300	44	823	32.40	311	12.24	9.3	11.72
	33X12.50R18LT	12PR	122	R	10J	1500	3305	550	80	832	32.76	318	12.52	11.9	14.99
	35X12.50R18LT	10PR	123	R	10J	1550	3415	450	65	883	34.76	318	12.52	11.9	14.99
18	**37X11.50R18LT**	8PR	127	Q	9J	1750	3860	450	65	934	36.77	290	11.42	11.9	14.99
	37X12.50R18LT	10PR	128	Q	10J	1800	3970	550	80	934	36.77	318	12.52	12.8	16.13
	37X13.50R18LT	8PR	124	Q	11J	1600	3525	350	50	934	36.77	345	13.58	12.8	16.13
	LT265/65R18	10PR	122/119	Q	8J	D 1360 S 1500	D 3000 S 3305	550	80	807	31.77	272	10.71	11.9	14.99
	LT265/70R18	10PR	124/121	Q	8J	D 1450 S 1600	D 3195 S 3525	550	80	835	32.87	272	10.71	11.9	14.99
	LT275/65R18	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80	821	32.32	279	10.98	11.9	14.99
	LT275/70R18	10PR	125/122	Q	8J	D 1500 S 1650	D 3305 S 3640	550	80	849	33.43	279	10.98	11.9	14.99



OPTIMUM X/T

EXTREME ALL-TERRAIN TIRE

Rim	Size	PR	Load Index	Speed symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Section Width		Tread Depth	
						kg	lbs	kpa	psi	mm	in	mm	in	mm	32nds
	LT285/60R18	10PR	122/119	Q	8 1/2J	D 1360 S 1500	D 3000 S 3305	550	80	805	31.69	292	11.50	11.9	14.99
	LT285/65R18	10PR	125/122	Q	8 1/2J	D 1500 S 1650	D 3305 S 3640	550	80	833	32.80	279	10.98	11.9	14.99
	LT285/70R18	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	550	80	863	33.98	292	11.50	11.9	14.99
	LT285/75R18	10PR	129/126	Q	8J	D 1700 S 1850	D 3750 S 4080	550	80	891	35.08	286	11.26	11.9	14.99
18	**LT295/70R18**	10PR	129/126	Q	8 1/2J	D 1700 S 1850	D 3750 S 4080	550	80	877	34.53	299	11.77	11.9	14.99
	LT305/65R18	12PR	128/125	Q	9J	D 1650 S 1800	D 3640 S 3970	550	80	859	33.82	311	12.24	11.9	14.99
	LT325/60R18	10PR	124/121	Q	9 1/2J	D 1450 S 1600	D 3195 S 3525	450	65	853	33.58	331	13.03	12.8	16.13
	LT325/65R18	10PR	127/124	Q	9 1/2J	D 1600 S 1750	D 3525 S 3860	450	65	885	34.84	331	13.03	12.8	16.13
	265/50R20 XL		111	T	8 1/2J	1090	2403	340	50	774	30.47	277	10.91	9.3	11.72
	275/55R20 XL		117	T	8 1/2J	1285	2833	340	50	810	31.89	284	11.18	9.3	11.72
20	**285/50R20 XL**		116	Q	9J	1250	2756	300	44	794	31.26	297	11.69	9.3	11.72
	305/50R20 XL		120	Q	9 1/2J	1400	3086	340	50	814	32.05	316	12.44	9.3	11.72
	305/55R20		116	Q	9 1/2J	1250	2756	300	44	844	33.23	316	12.44	9.3	11.72



OPTIMUM X/T

EXTREME ALL-TERRAIN TIRE

Rim	Size	PR	Load Index	Speed symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Section Width		Tread Depth	
						kg	lbs	kpa	psi	mm	in	mm	in	mm	32nds
	33X12.50R20LT	12PR	119	R	10J	1360	3000	550	80	832	32.76	318	12.52	13.8	17.39
	35X11.50R20LT	10PR	124	Q	9J	1600	3525	550	80	883	34.76	290	11.42	11.9	14.99
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80	883	34.76	318	12.52	11.9	14.99
	35X13.50R20LT	12PR	126	Q	11J	1700	3750	550	80	883	34.76	345	13.58	11.9	14.99
	37X12.50R20LT	10PR	126	Q	10J	1700	3750	450	65	934	36.77	318	12.52	12.8	16.13
	37X13.50R20LT	10PR	127	Q	11J	1750	3860	450	65	934	36.77	345	13.58	11.9	14.99
	38X13.50R20LT	10PR	128	Q	11J	1800	3970	450	65	959	37.76	345	13.58	12.8	16.13
	LT265/60R20	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80	832	32.76	272	10.71	11.9	14.99
20	**LT275/55R20**	10PR	120/117	S	8 1/2J	D 1285 S 1400	D 2835 S 3085	550	80	816	32.13	284	11.18	11.9	14.99
	LT275/60R20	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80	844	33.23	279	10.98	11.9	14.99
	LT275/65R20	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80	872	34.33	279	10.98	11.9	14.99
	LT285/55R20	10PR	122/119	S	9J	D 1360 S 1500	D 3000 S 3305	550	80	828	32.60	297	11.69	11.9	14.99
	LT285/60R20	10PR	125/122	Q	8 1/2J	D 1500 S 1650	D 3305 S 3640	550	80	856	33.70	292	11.50	11.9	14.99
	LT285/65R20	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	550	80	884	34.80	292	11.50	11.9	14.99
	LT295/55R20	10PR	123/120	Q	9 1/2J	D 1400 S 1550	D 3085 S 3415	550	80	838	32.99	309	12.17	11.9	14.99



OPTIMUM X/T

EXTREME ALL-TERRAIN TIRE

Rim	Size	PR	Load Index	Speed symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Section Width		Tread Depth	
						kg	lbs	kpa	psi	mm	in	mm	in	mm	32nds
	LT295/60R20	10PR	126/123	Q	8 1/2J	D 1550 S 1700	D 3415 S 3750	550	80	868	34.17	299	11.77	11.9	14.99
	LT295/65R20	10PR	129/126	Q	8 1/2J	D 1700 S 1850	D 3750 S 4080	550	80	898	35.35	299	11.77	11.9	14.99
20	**LT305/55R20**	12PR	125/122	Q	9 1/2J	D 1500 S 1650	D 3305 S 3640	550	80	850	33.46	316	12.44	11.9	14.99
	LT325/60R20	10PR	126/123	Q	9 1/2J	D 1550 S 1700	D 3415 S 3750	450	65	904	35.59	331	13.03	12.8	16.13
	33X12.50R22LT	12PR	114	R	10J	1180	2600	550	80	832	32.76	318	12.52	11.9	14.99
	35X12.50R22LT	12PR	121	R	10J	1450	3195	550	80	883	34.76	318	12.52	11.9	14.99
	37X12.50R22LT	12PR	127	Q	10J	1750	3860	550	80	934	36.77	318	12.52	12.8	16.13
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80	934	36.77	345	13.58	11.9	14.99
22	**38X13.50R22LT**	10PR	126	Q	11J	1700	3750	450	65	959	37.76	345	13.58	12.8	16.13
	38X15.50R22LT	10PR	128	Q	12 1/2J	1800	3970	450	65	959	37.76	395	15.55	12.8	16.13
	LT285/50R22	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	550	80	851	33.50	297	11.69	11.9	14.99
	LT285/55R22	10PR	124/121	Q	9J	D 1450 S 1600	D 3195 S 3525	550	80	879	34.61	297	11.69	11.9	14.99
	LT325/50R22	12PR	127	Q	10J	1750	3860	550	80	891	35.08	336	13.23	12.8	16.13
	37X13.50R24LT	12PR	124	Q	11J	1600	3525	550	80	934	36.77	345	13.58	11.9	14.99
	38X13.50R24LT	12PR	127	Q	11J	1750	3860	550	80	959	37.76	345	13.58	12.8	16.13
24	**38X15.50R24LT**	12PR	128	Q	12 1/2J	1800	3970	550	80	959	37.76	395	15.55	12.8	16.13
	LT315/50R24	12PR	127/124	Q	10J	D 1600 S 1750	D 3525 S 3860	550	80	932	36.69	328	12.91	12.8	16.13



OPTIMUM SPORT M/T

MUD TERRAIN TIRE

Outstanding Traction on Mud Terrain

The unique dual layer tread design provides excellent off-road traction and grip

Engineered with reinforced tread blocks and chamfered edges to minimize irregular wear and maximize tread life


Excellent Off-Road Durability

Aggressive sidewall lugs enhance resistance to cuts and chips while promoting stone ejection for improved durability and off-road confidence

MADE IN EUROPE



TEST RESULT

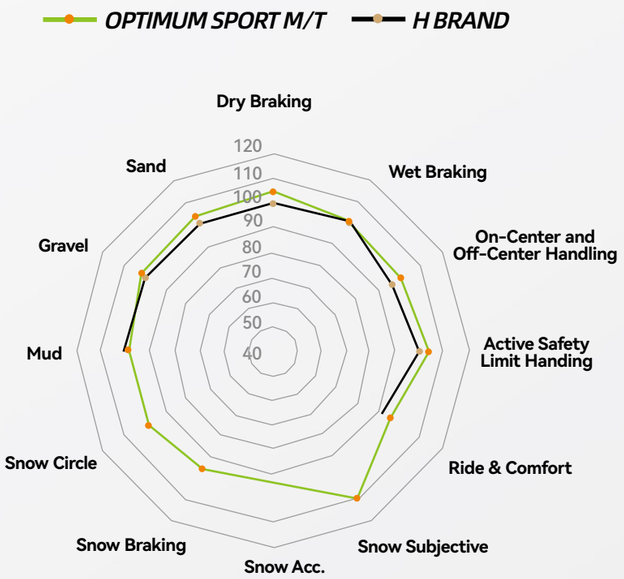



OPTIMUM SPORT M/T

MUD TERRAIN TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	LT215/75R15	6PR	100/97	Q	6J	D730 S800	D1610 S1760	350	50
	LT235/75R15	6PR	104/101	Q	61/2J	D825 S900	D1820 S1985	350	50
	30×9.50R15LT	6PR	104	Q	71/2J	900	1985	350	50
	31×10.50R15LT	6PR	109	Q	81/2J	1030	2270	350	50
	33×12.50R15LT	6PR	108	Q	10J	1000	2205	250	36
16	LT225/75R16	8PR	110/107	Q	6J	D975 S1060	D2150 S2335	450	65
	LT235/85R16	10PR	120/116	Q	61/2J	D1250 S1400	D2755 S3088	550	80
	LT245/75R16	10PR	120/116	Q	7J	D1260 S1380	D2778 S3042	550	80
	LT265/70R16	6PR	110/107	Q	8J	D975 S1060	D2150 S2335	350	50
	LT265/75R16	10PR	123/120	Q	71/2J	D1550 S1400	D3085 S3415	550	80
	LT285/75R16	10PR	126/123	Q	8J	D1550 S1700	D3415 S3750	550	80
	LT305/70R16	10PR	124/121	Q	9J	D1450 S1600	D3195 S3525	450	65
	LT315/75R16	10PR	127/124	Q	81/2J	D1600 S1750	D3525 S3860	450	65
17	LT235/80R17	10PR	120/117	Q	61/2J	D1285 S1400	D2835 S3085	550	80
	LT265/70R17	10PR	121/118	Q	8J	D1320 S1450	D2910 S3195	550	80
	LT285/70R17	10PR	121/118	Q	81/2J	D1320 S1450	D2910 S3195	450	65
	LT305/70R17	8PR	119/116	Q	9J	D1250 S1380	D2755 S3000	350	50
	33X12.50R17LT	10PR	120	Q	10J	1400	3085	450	65
	37X13.50R17LT	10PR	121	Q	11J	1450	3195	450	65



OPTIMUM SPORT M/T

MUD TERRAIN TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17	35×12.50R17LT	10PR	121	Q	10J	1450	3195	450	65
18	LT275/70R18	10PR	125/122	Q	8J	D1500 S1650	D3305 S3640	550	80
	33×12.50R18LT	10PR	118	Q	10J	1320	2910	450	65
	33×12.50R18LT	12PR	122	Q	10J	1500	3305	550	80
	35×12.50R18LT	10PR	123	Q	10J	1550	3415	450	65
	35×12.50R18LT	12PR	128	Q	10J	1800	3970	550	80
20	LT275/55R20	10PR	120/117	Q	81/2J	D1285 S1400	D2835 S3085	550	80
	LT285/55R20	10PR	122/119	Q	9J	D1360 S1500	D3000 S3305	550	80
	LT285/65R20	10PR	127/124	Q	81/2J	D1600/ S1750	D3525/ S3860	550	80
	LT305/55R20	10PR	121/118	Q	91/2J	D1320/ S1450	D2910/ S3195	450	65
	33×12.50R20LT	10PR	114	Q	10J	1180	2600	450	65
	33×12.50R20LT	12PR	119	Q	10J	1360	3000	550	80
	35×12.50R20LT	10PR	121	Q	10J	1450	3195	450	65
	35×12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
	37X13.50R20LT	10PR	127	Q	11J	1750	3860	450	65
	37X13.50R20LT	12PR	128	Q	11J	1800	3970	550	80
22	33×12.50R22LT	10PR	109	Q	10J	1030	2270	450	65
	33×12.50R22LT	12PR	114	Q	10J	1180	2600	450	65
	35×12.50R22LT	10PR	117	Q	10J	1285	2835	450	65
	35×12.50R22LT	12PR	121	Q	10J	1450	3195	450	65
	37X13.50R22LT	10PR	123	Q	11J	1550	3415	450	65
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80
24	37X13.50R24LT	10PR	120	Q	11J	1400	3085	450	65
26	37X13.50R26LT	10PR	114	Q	11J	1180	2600	450	65

Replacement Market Tires Warranty Manual

Warranty Eligibility

This Limited Warranty applies to all qualified replacement-market passenger and light truck tires manufactured by Shandong Linglong Tyre Co., Ltd. and its subsidiaries. This Limited Warranty applies only to the original purchaser and only to tires bearing a complete brand identification and a valid DOT code or barcode. This Limited Warranty is valid only if all of the following conditions are met:

- The tires were manufactured on or after January 1, 2025, and were shipped to North America for sale and use.
- The tire fails due to the workmanship or materials.
- The tire is within the applicable warranty period, and the remaining tread depth is above the Tread Wear Indicator (TWI).

What Is Warranted and for How Long

If a tire covered by this Limited Warranty becomes unserviceable due to a defect in workmanship or materials while the remaining tread depth is above the Tread Wear Indicator (TWI), Linglong will provide warranty coverage in accordance with the terms and conditions of this Limited Warranty.

- The warranty period is six (6) years from the date of purchase or seven (7) years from the date of manufacture, whichever comes first, provided the remaining tread depth is above the Tread Wear Indicator (TWI).
- If a tire fails due to manufacturing defects and meets the warranty terms and conditions, with remaining tread depth above the TWI, a new tire of the same specification will be provided free of charge.

What Is Not Covered

1. Road hazard damage caused by obstacles or debris, including cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions, or impact breaks.
2. Improper or failed repairs.
3. Damage resulting from improper inflation or improper maintenance.
4. Damage caused by improper mounting or dismounting.
5. Mechanical irregularities such as bent wheel assemblies, misalignment worn or faulty components.
6. Damage caused by overinflation, underinflation, overloading, or defective vehicle mechanical conditions.
7. Damage from over-inflation or under-inflation, overloading, defective vehicle mechanical conditions.
8. Non-racing or off-road tires that have been misused or abused in racing or off-road applications.
9. Damage caused by ozone or weather cracking, misuse, abuse, tire modifications, or operation while flat (run-flat damage).
10. Any tire from which the DOT identification number and/or brand name has been intentionally removed.
11. Tires that have been modified after leaving the factory, including the addition of fillers, sealants, balancing compounds, or external tire treatments. If any added material is determined to have caused the failure, the tire will not be eligible for warranty coverage.
12. Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.
13. Vehicles or tires operated beyond their rated load capacity.
14. Additional monetary loss, such as damage of the vehicle or time, etc.

Road Hazard Warranty

If a tire becomes unserviceable due to a non-repairable road hazard, it must meet the following eligibility requirements:

- The tire must be within one (1) year of the date of purchase. The original proof of purchase must be provided.
- For eligible tires, compensation will be equal to 50% of the total FOB tire price plus freight.

Treadwear Mileage Warranty

If an eligible tire wears evenly to the Tread Wear Indicator (TWI) before reaching the warranted mileage, under normal passenger vehicle use and within the applicable Limited Warranty period. The unused service will be subsidized on a pro-rata basis to purchase a new tire. To submit a claim, installation record, tire rotation record, tire rotation records, and tire removal record must be provided with the claimed tire.

- Tires must be rotated every 6,000 to 8,000 miles (10,000 to 13,000 km), or sooner.
- This warranty does not apply to original equipment (OE) tires.
- The Treadwear Mileage Warranty applies only to the original purchaser and owner of the tires.
- This Mileage Warranty does not apply to tires used in commercial applications, including but not limited to law enforcement vehicles, taxi services, courier services, delivery fleets, or other commercial uses.
- To qualify for this warranty, tires must show even tread wear, with no more than a 2/32" difference in tread depth across the tire tread.

Mileage Warranty Product List

Product Line	Mileage Warranty
OPTIMUM HP	60,000 miles (100,000km)
OPTIMUM UHP	50,000 miles (80,000km)
OPTIMUM SPORT HP	60,000 miles (100,000km)
OPTIMUM SPORT H/T	65,000 miles (110,000km)
OPTIMUM SPORT A/T	65,000 miles (110,000km)
OPTIMUM X/T	55,000 miles (90,000km)
EARTH TRAXX R/T	50,000 miles (80,000km)

90-DAY Customer Satisfaction Trial

LingLong offers a 90 Day Free Trial as the following :

- Applies to passenger tires only (Excludes commercial, light truck (LT), racing, and other specialty tires).
- This Satisfaction Guarantee applies only to the original purchaser who purchases at least four (4) new passenger tires in a single transaction. It does not apply to replacement tires provided under this guarantee.
- This guarantee does not apply to tires that have been intentionally damaged or damaged due to misuse, abuse, or improper use.
- How do you return your tires during the trial period?

A.Within the applicable trial period from the date of purchase, you must return your tires to the tire dealer where you purchased your tires.
B.Present the original sales receipt or other proof of purchase.
C.Provide the reason for your dissatisfaction (such as appearance, ride comfort, or handling, etc.).

To Make a Claim Under This Limited Warranty

- Present your tires and the original proof of purchase to the original place of purchase or any authorized Company dealer.
- Complete and sign the Warranty Claim Adjustment Form, keep a copy for your records, and leave the tire with the dealer for warranty claim processing;

Owner's Responsibilities

- At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
- To submit a warranty claim, contact the original place of purchase or any authorized Company dealer.
- The owner is responsible for all service charges and applicable taxes.
- A copy of the original proof of purchase must be submitted to support the warranty claim.

Tire Safety and Maintenance

Tire failure can result in serious property damage and/or personal injury. To help reduce these risks, we recommend the following safety practices:

1. Maintain proper tire inflation pressure. Do not underinflate or overinflate your tires. Always maintain inflation pressure according to the vehicle manufacturer's recommendations or the tire manufacturer's specifications.
2. Check wheel alignment and tire balance regularly to help ensure proper handling, performance, and even tread wear.
3. Do not overload your vehicle. Refer to the tire sidewall markings for the tire's maximum load-carrying capacity.
4. Avoid excessive tire spinning & impacts with curbs, potholes, obstacles, pavement edges.
5. Never drive on worn-out (bald) tires. By law, tires must be replaced when the tread reaches the Tread Wear Indicator (TWI).
6. Inspect your tires regularly for signs of damage, including cuts, abrasions, punctures, foreign objects, separations, or bulges. If damage is found, replace the tire with the spare tire (if available) and consult an authorized tire dealer.
7. Do not exceed posted speed limits or the maximum speed rating specified for the tire.
8. To promote even wear and maximize tread life, rotate your tires at least every 6,000 miles (10,000 km) or according to the vehicle manufacturer's recommendations.

Exclusions, Limitations, and Legal Rights

No representative, dealer, or distributor is authorized to make any representation, promise, or agreement on behalf of Linglong, except as expressly stated in this warranty document. Any tire, regardless of construction quality, may fail in service or otherwise become unserviceable due to conditions beyond the manufacturer's control. This warranty does not constitute a representation that tire failure will not occur under any circumstances.

DISCLAIMER: This warranty is provided in lieu of all other warranties and representations, express or implied. Linglong expressly disclaims all implied warranties, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. No other warranty, guarantee, or representation of any kind shall be deemed to exist or arise by operation of law.

LIMITATION OF DAMAGES: Under no circumstances shall Linglong be liable for any indirect, special, incidental, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of reputation or goodwill, or costs related to replacement transportation or other related expenses. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages; therefore, certain portions of this limitation may not apply in specific jurisdictions.

This warranty establishes specific legal rights and obligations. Additional rights may apply depending on the applicable state or provincial laws.